



Zidni električni bojler



POLYURETHANE
INSULATION



ENAMELLED
STEEL TANK



TITANIUM
PLUS

- JEDNOSTAVAN PRISTUP ELEKTRIČNIM KOMPONENTAMA
- NIŽA RAZINA BUKE KOD GRIJANJA
- RUČKE ZA NOŠENJE
- PRIRUBNICA PROMJERA Ø 105 MM ZA JEDNOSTAVNI PREGLED

jednostavan
i siguran

Tehnički podaci - ukupne dimenzije


		ARI 150 V THER	ARI 150 H THER	ARI 200 V THER	ARI 200 H THER		ARI 150 V THER	ARI 150 H THER	ARI 200 V THER	ARI 200 H THER
Kapacitet	l	150	150	200	200	a mm	750	750	1050	1050
Snaga	kW	1,8	2	2,2	2	b mm	500	500	800	800
Napon	V	230	230	230	230	c mm	1010	1010	1270	1480
Vrijeme zagrijavanja ($\Delta T = 50^{\circ}\text{C}$) h, min.		5,10	4,40	5,35	5,50	d mm	230	230	230	230
Toplinski gubici kWh/24h		1,41	1,87	1,85	2,07	e mm	175	175	175	175
Maks. radna temperatura	$^{\circ}\text{C}$	65	75	65	75	f mm	560	560	560	510
Debljina izolacije	mm	30	30	30	30	g mm	575	575	575	575
Zaštita	IP	25D	25	25D	25	h mm	G3/4	G3/4	G3/4	G3/4
Masa	kg	37	37	45	45					

ARI 150 V THER
3000060

ARI 150 H THER
3010190

ARI 200 V THER
3000061

ARI 200 H THER
3010191

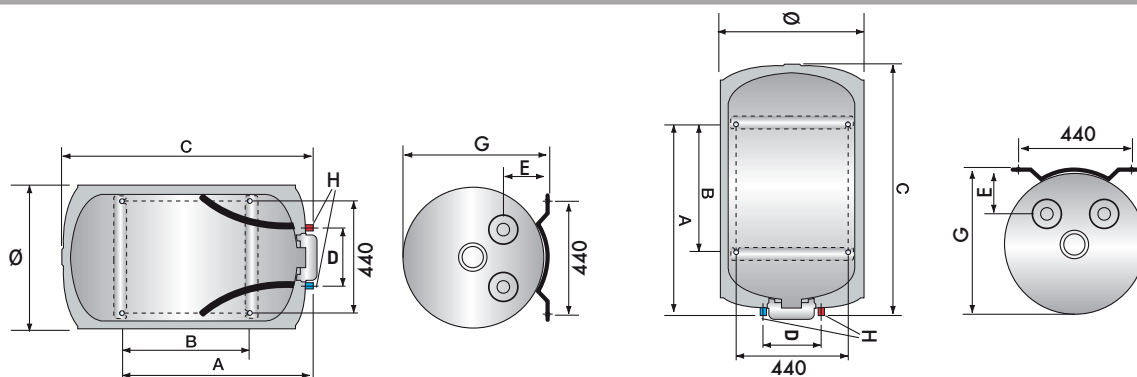

LEGENDA

E Ulaz hladne vode G 3/4"

U Izlaz tople vode G 3/4"